


## MSC SEWAGE SUBMERSIBLE PUMP

### Performance Table

Model	Power		Voltage	Rotation	Q m³/h	Flowrate in m³/h							
	W	HP	V	P/rmp		0	5	10	15	20	25	30	35
	Total Head in Meters												
MSC550*	550	0.75	220/240	2P/2850	H m	10	8.4	7.6	6.4	5	3.5	1.8	-
MSC750*	750	1	220/240	2P/2850		12.4	11.6	10.6	9.5	8.3	6.8	5.4	-



### MSC Pump Performance Curve

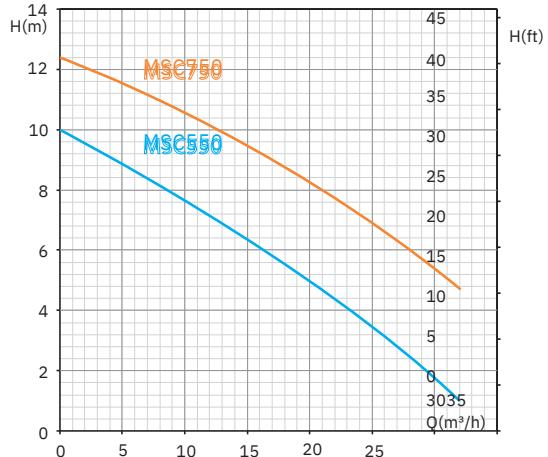

### Features

- With Italian double mechanical seal
- 316SS shaft, heat resistant material, special engineering plastics
- Equipped with imported overheating protection device
- Large flow, small power, power saving, maximum passage size of suspended particles 25mm to 35mm

### Applications

Suitable for factory, fish pond, family ornamental fish for aquaculture circulating water, and suitable for fishing boats, Marine farms.

+254 728 355530



+254 712 646360



[www.eskl.co.ke](http://www.eskl.co.ke)



P.O. BOX 31853-00600  
Nairobi.



[sales@eskl.co.ke](mailto:sales@eskl.co.ke)



Thika Rd, Exit 10 Next  
to Kenya Clay, Ruiru