


## SEN 40-200A SERIES CENTRIFUGAL PUMP

Performance Table

TYPE	P2 NOM		A (3X400V) 50HZ	FLOWRATE											
	HP	KW		0	5	10	15	20	25	30	35	40	45	50	55
	Head in Meters														
SEN 40-200A	10	7.5	8.8	57.7		58	57	55	54	50.5	47	43			



SEN 40-200A Pump Performance Curve

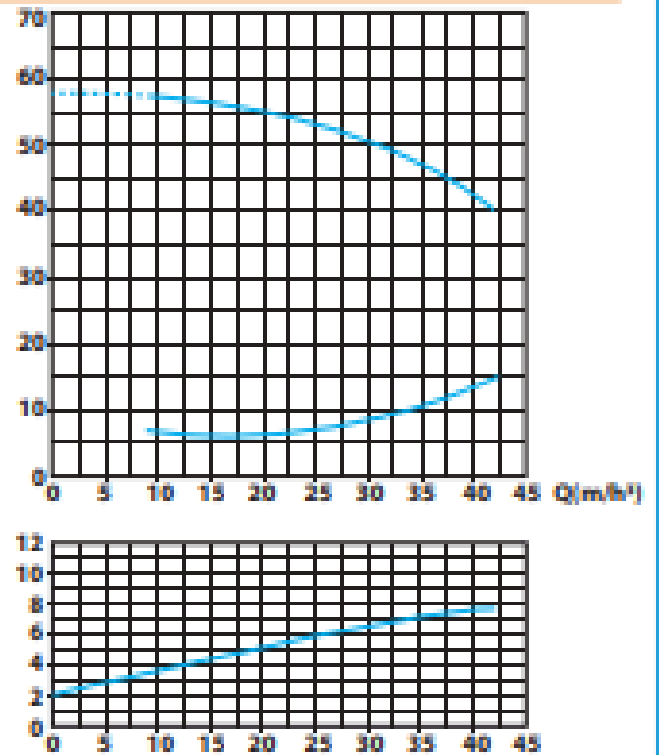

Model	Dimensions (mm)														
	DNM	DNA	a	h1	h2	m1	m2	n1	n2	b	x	s	C	B	H
SEN 40-200A	40	65	100	160	180	100	70	265	212	50	15	14	590	273	340

### Features

- ✓ As per EN733 (DIN24255) standards.
- ✓ Closed couple pump with companion flange.
- ✓ NSK bearing with IP54 Protection.
- ✓ Stainless steel shaft with Cast Iron Impeller.




## SEN 32-200C SERIES CENTRIFUGAL PUMP

Performance Table

TYPE	P2 NOM		A (3X400V) 50HZ	FLOWRATE											
	HP	KW		0	5	10	15	20	25	30	35	40	45	50	55
	Head in Meters														
SEN 32-200C	5.5	4.0	8.8	40.1	40	39	38	34	30						



SEN 32-200C Pump Performance Curve

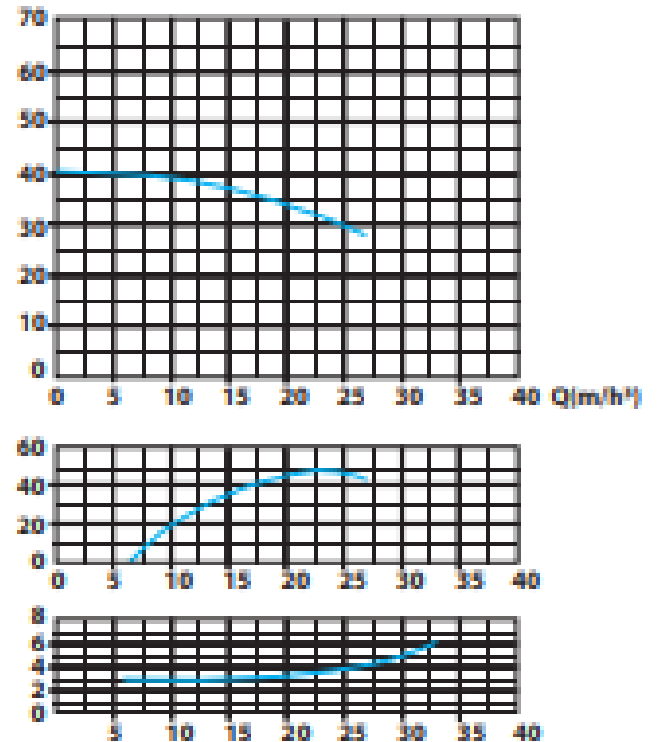

Model	Dimensions (mm)														
	DNM	DNA	a	h1	h2	m1	m2	n1	n2	b	x	s	C	B	H
SEN 32-200C	32	50	80	160	180	100	70	240	190	50	12	14	505	268	340

### Features

- ✓ As per EN733 (DIN24255) standards.
- ✓ Closed couple pump with companion flange.
- ✓ NSK bearing with IP54 Protection.
- ✓ Stainless steel shaft with Cast Iron Impeller.




## SEN 50-200B SERIES CENTRIFUGAL PUMP

Performance Table

TYPE	P2 NOM		A	FLOWRATE												
	HP	KW		(30400V) 50HZ	0	10	20	30	40	50	60	70	80	90	100	110
			Head in Meters													
SEN 50-200B	15	11	21	50.8			50.1	47.5	44	39	32.5					



SEN 50-200B Pump Performance Curve

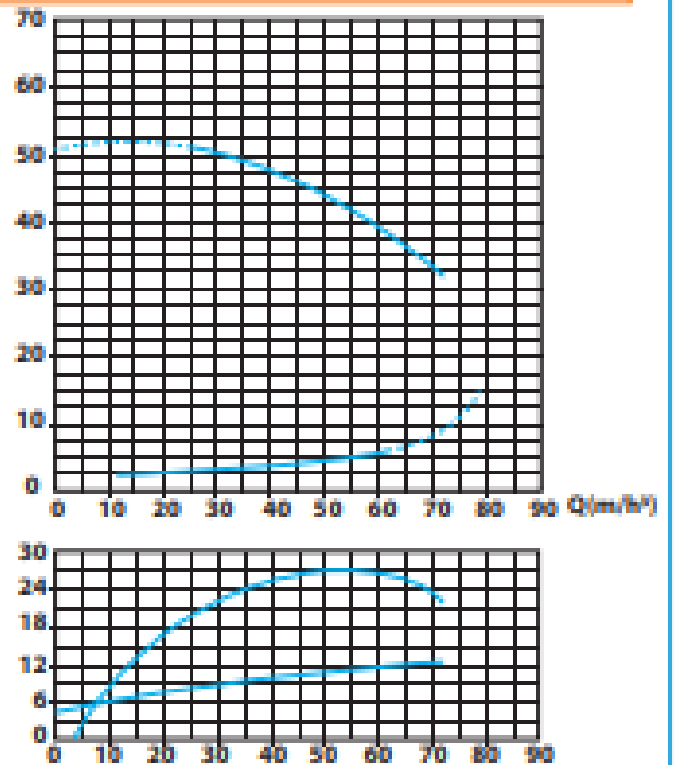

Model	Dimensions (mm)														
	DNM	DNA	a	h1	h2	m1	m2	n1	n2	l	x	s	C	B	H
SEN 50-200B	50	65	100	160	200	100	70	265	212	50	12	14	635	290	360

### Features

- ✓ As per EN733 (DIN24255) standards.
- ✓ Closed couple pump with companion flange.
- ✓ NSK bearing with IP54 Protection.
- ✓ Stainless steel shaft with Cast Iron Impeller.


## SEN 50-250A SERIES CENTRIFUGAL PUMP

Performance Table

TYPE	P2 NOM		A (3X400V) 50HZ	FLOWRATE												
	HP	KW		0	10	20	30	40	50	60	70	80	90	100	110	120
	Head in Meters															
SEN 50-250A	30	22	51.5	90.0			89.8	87	84	80	75					



SEN 50-250A Pump Performance Curve

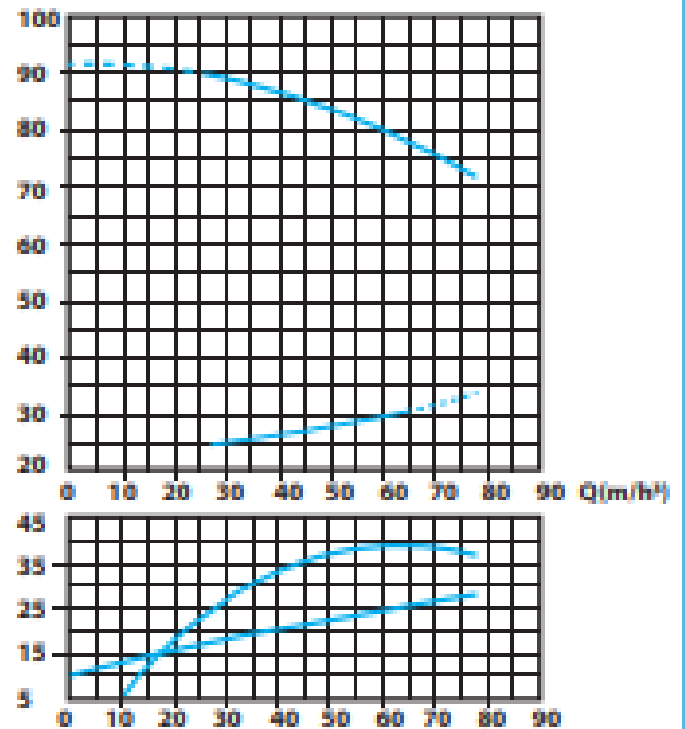

Model	Dimensions (mm)														
	DNM	DNA	a	h1	h2	m1	m2	n1	n2	b	x	s	C	B	H
SEN 50-250A	50	65	100	180	225	125	95	320	250	65	14	14	750	332	405

### Features

- ✓ As per EN733 (DIN24255) standards.
- ✓ Closed couple pump with companion flange.
- ✓ NSK bearing with IP54 Protection.
- ✓ Stainless steel shaft with Cast Iron Impeller.

+254 728 355530



+254 712 646360



www.eskl.co.ke



P.O. BOX 31853-00600  
Nairobi.



sales@eskl.co.ke



Thika Rd, Exit 10 Next  
to Kenya Clay, Ruiru


## SEN 65-200A SERIES CENTRIFUGAL PUMP

Performance Table

TYPE	P2 NOM		A (3X400V) 50HZ	FLOWRATE										
	HP	KW		0	20	40	60	80	100	120	140	160	180	200
	Head in Meters													
SEN 65-200A	30	22.5	43.8	60.2			61	58	55	50	44			



SEN 65-200A Pump Performance Curve

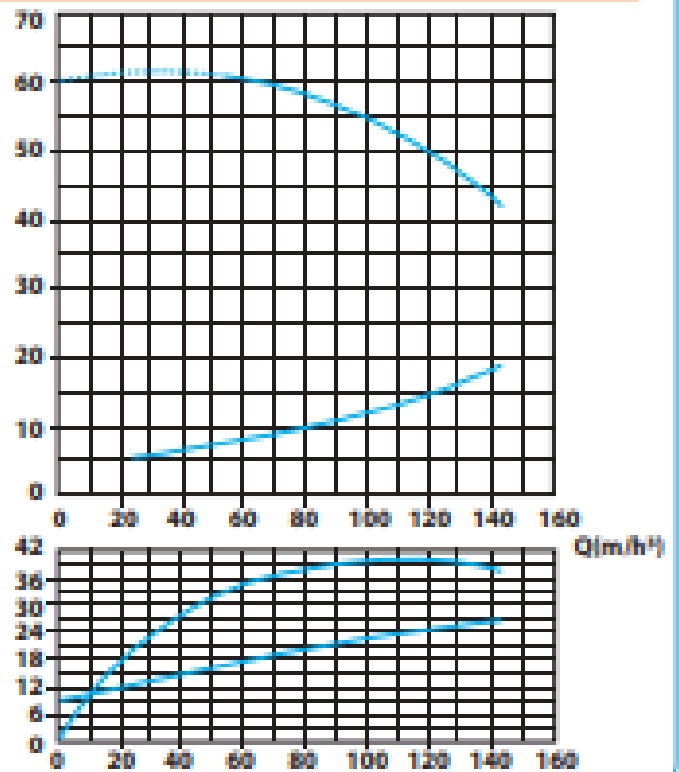

Model	Dimensions (mm)														
	DNM	DNA	a	h1	h2	m1	m2	n1	n2	b	x	s	C	B	H
SEN 65-200A	65	80	100	180	225	125	95	320	250	65	14	14	750	330	405

### Features

- ✓ As per EN733 (DIN24255) standards.
- ✓ Closed couple pump with companion flange.
- ✓ NSK bearing with IP54 Protection.
- ✓ Stainless steel shaft with Cast Iron Impeller.